



IP44 Damp Location



50000 Hrs



No Flicker




Dimmable

LUMICOR
LIGHTING

LED Flush Mount Panels

- 7INCH
- AC120V
- 3CCT/5CCT

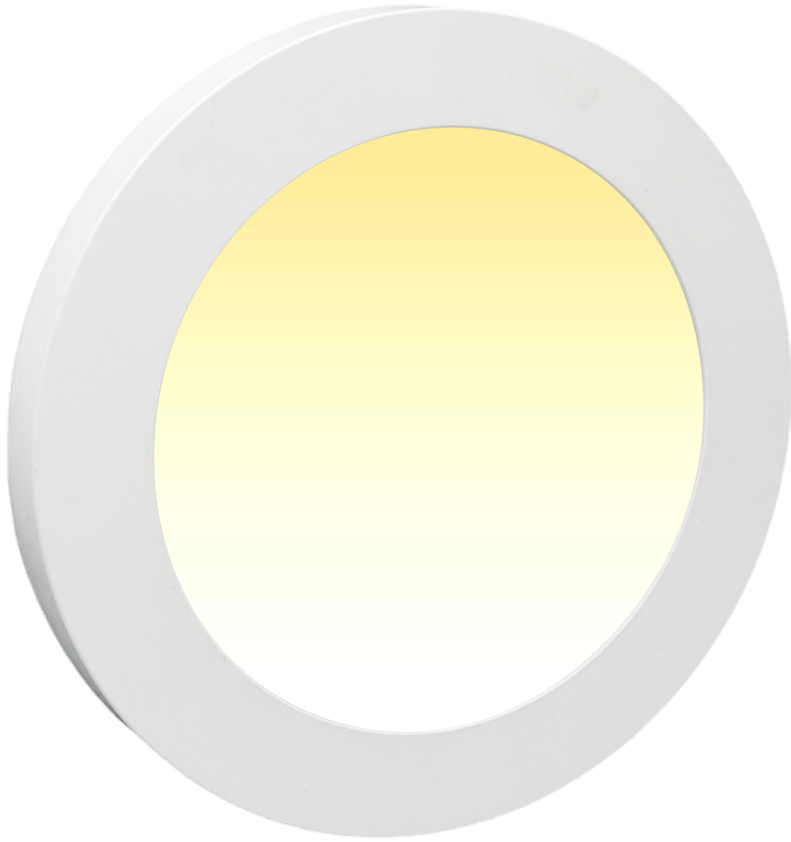


SPECIFICATIONS



Power(Wattage)	12W	
Size	7"	
Lumen	1200LM	
Input Voltage	AC120V 60Hz	
Color Temperature	3CCT(30K-40K-50K)	5CCT(27K-30K-35K-40K-50K)
Dimmable	Triac Dimmable	
IP Rated	IP44 Damp Location	
Beam Angle	110°	
Light Color	White/Black	
Shape	Round	

CRI	>80
LED Chips Type	SMD 2835
Power Factor	>0.9
Triac Dimmable	Yes
Thickness	20.5mm
Operating temperature	-20℃~40℃
Working Life-span	>50,000H
Warranty	5 Years
Certificates	ETL/ES/FCC


LED Flush Mount Panels

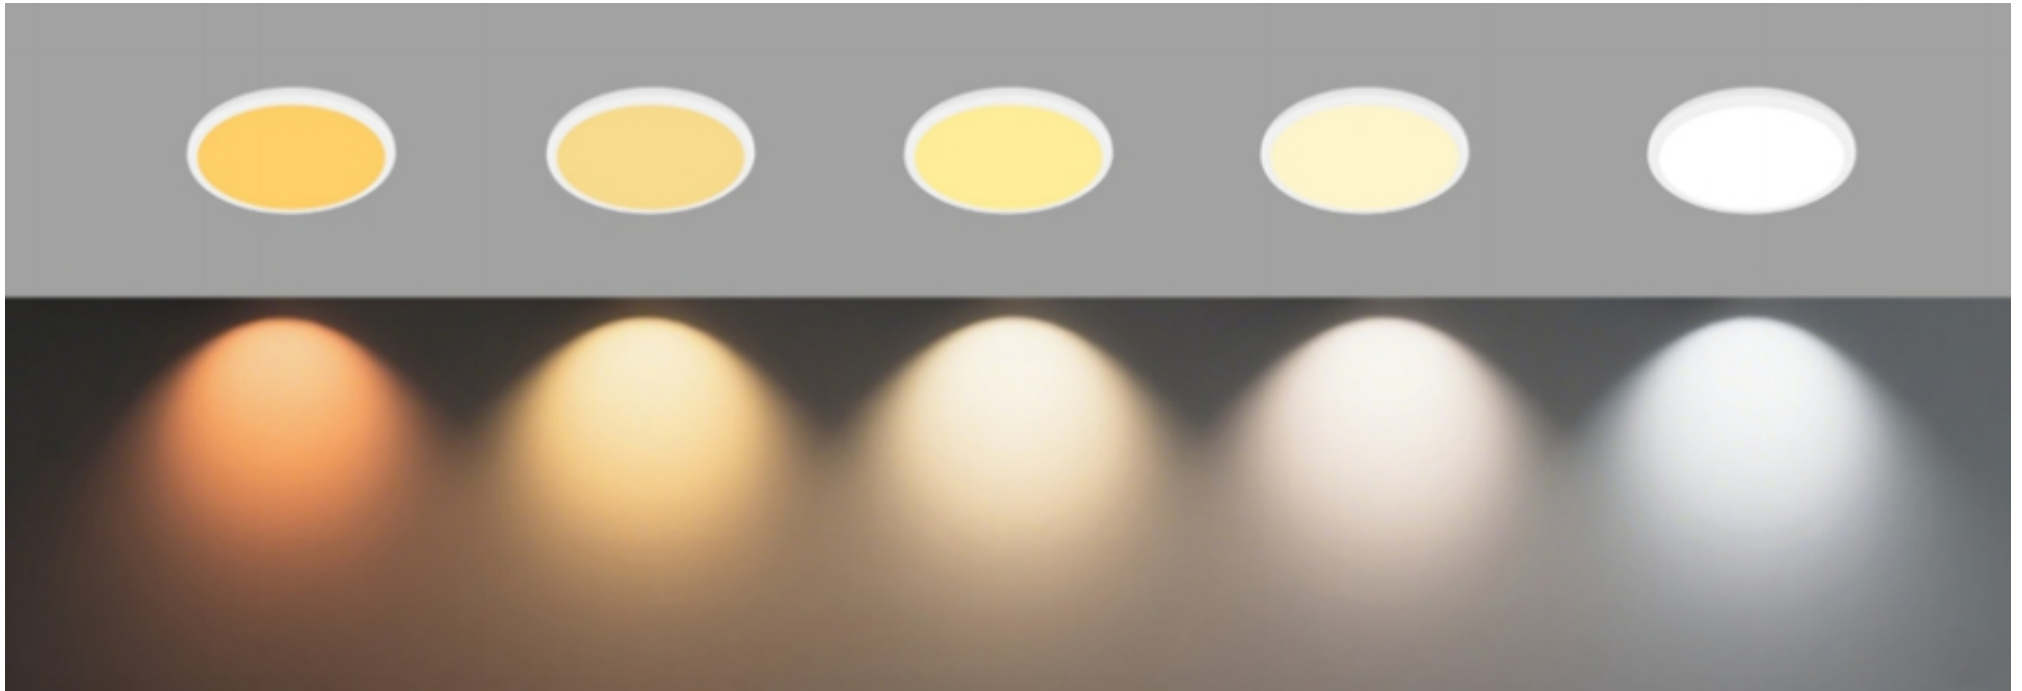

Ordering Guide

Product	Mode	Size(Inch)	Power	Voltage	CCT	Lumen	Beam Angle	Dimmable	Finish
LED Flush Mount Panels	LM-SDL070-R-3C(3+5) LM-SDL070-R-5C(2.7+5)	7INCH	12W	AC120V	3CCT(30-40-50K) 5CCT(27-30-35-40-50K)	1200LM	110°	Triac dimmable	BK=Black WH=White

Product Dimensions

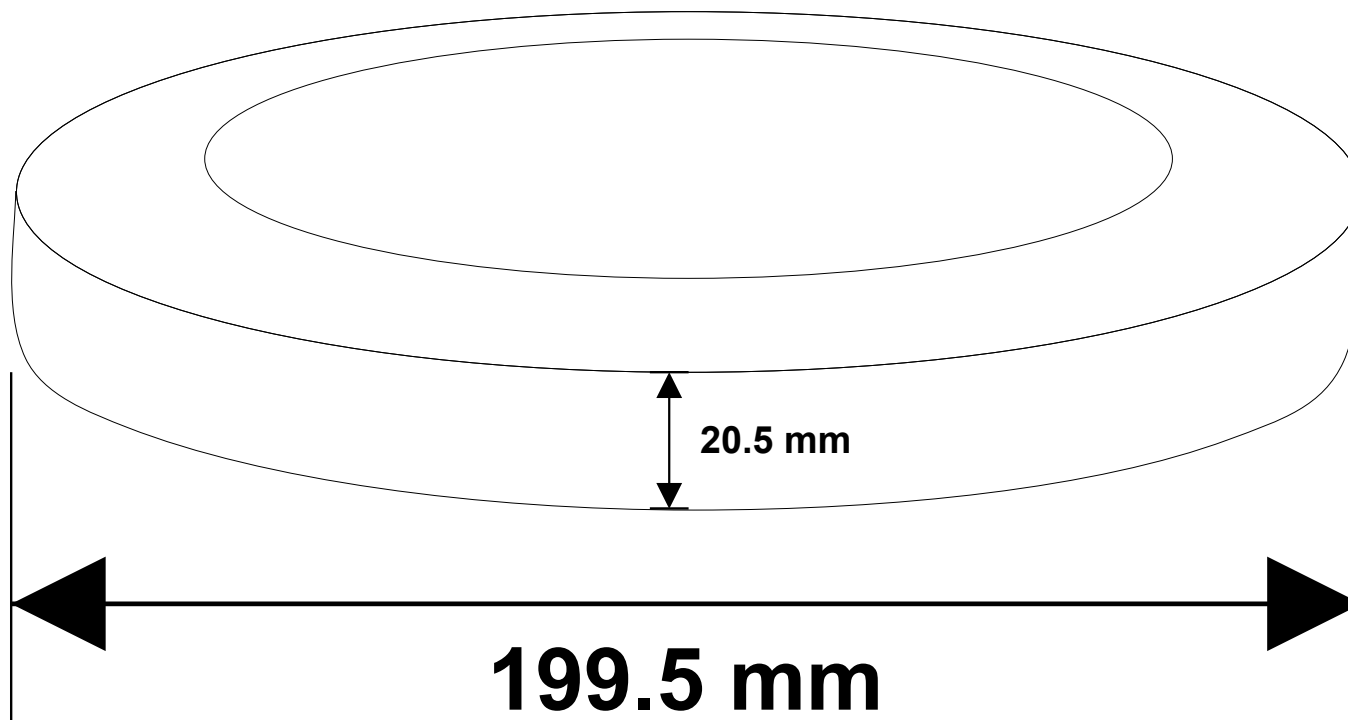

INSTALLATION GUIDE



1: Fix the base plate onto the ceiling with 4 screws.



2: Connect L/N wires with quick connectors.



3: Push up the flush mount ceiling light.



4: Install the ceiling lamp on the base plate by rotating clockwise.

PACKAGING



Model	Size	G.W (KG)	Carton Size (CM)	QTY/ctn(pcs)
LM-SDL070-R-5C(2.7+5)-ABS	7"	6.6KG	39*27.5*20	(20PCS/CTN)

One app for all your Word, Excel, PowerPoint and PDF needs. Get the Microsoft 365 Copilot app:
<https://aka.ms/GetM365>