



IP44 Damp Location



50000 Hrs



No Flicker



Dimmable

LUMICOR
LIGHTING



LED Flush Mount Panels

- 5INCH
- AC120V
- 2700K/3000K/3500K/4000K/5000K



SPECIFICATIONS



Power(Wattage)	6W
Size	5"
Lumen	500LM
Input Voltage	AC120V 60Hz
Color Temperature	5CCT(27K-30K-35K-40K-50K)
Dimmable	Triac Dimmable
IP Rated	IP44 Damp Location
Beam Angle	110°
Light Color	White/Black
Shape	Round

CRI	>80
LED Chips Type	SMD 2835
Power Factor	>0.9
Triac Dimmable	Yes
Thickness	14mm
Operating temperature	-20℃~40℃
Working Life-span	>50,000H
Warranty	5 Years
Certificates	ETL/ES/FCC


LED Flush Mount Panels



Ordering Guide

Product	Model	Size(Inch)	Power	Voltage	CCT	Lumen	Beam Angle	Dimmable	Finish
LED Flush Mount Panels	LM-SDL050	5INCH	6W	AC120V	5CCT(27-30-35-40-50K)	500LM	110°	Triac dimmable	BK=Black WH=White


Product Dimensions

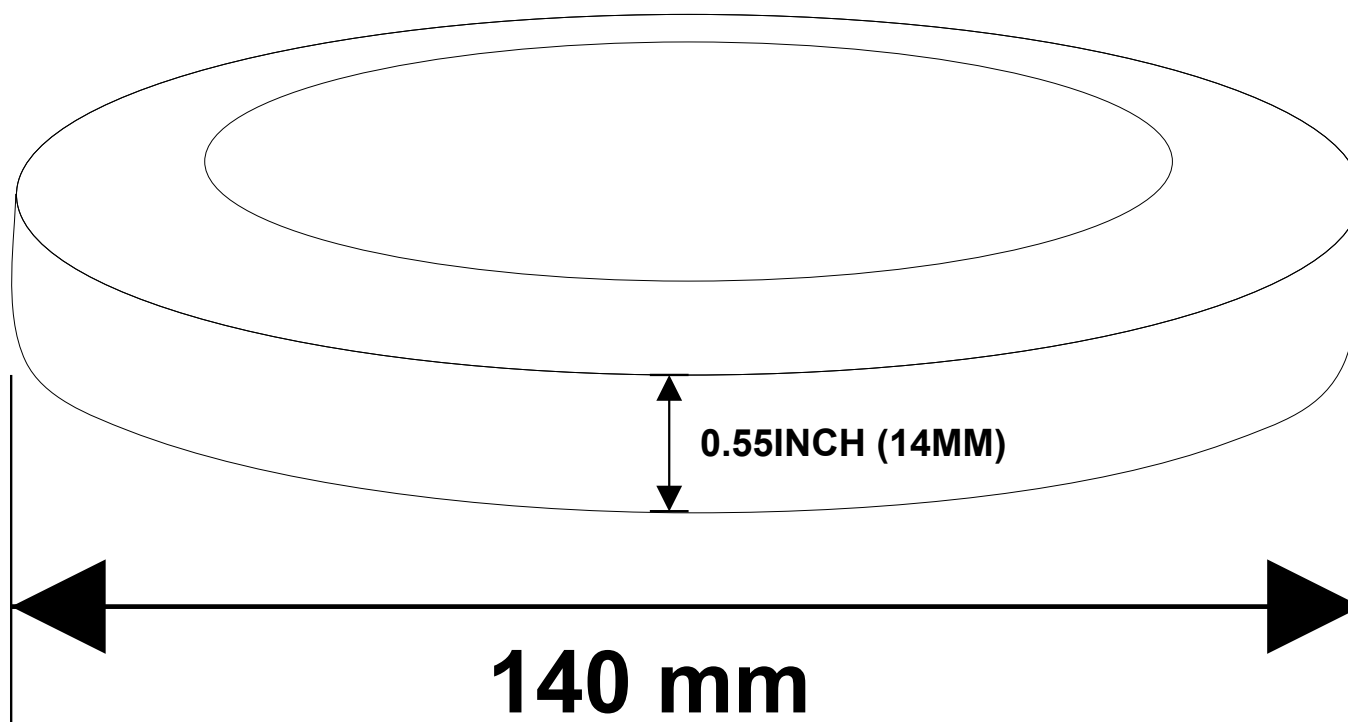


Installation Steps

Step 1: Please set your desired color temperature before installation.


Step 2: Turned off the electricity,as shown in Figure 1.




Step3: Fix the mounting plate to the J-BOX by using two screws with screwdriver, as shown in Figure 2.

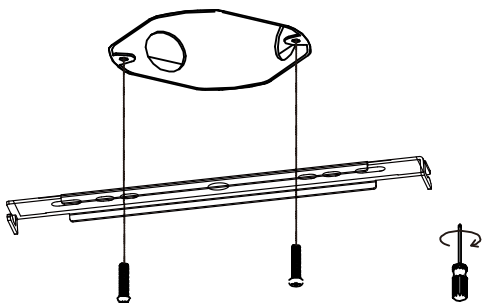


Step4: Connect the two input wires to the corresponding wires with wire caps (L-L,N-N), and connect the ground wire to the external ground wire with the third wire cap (G-G). as shown in Figure 3.

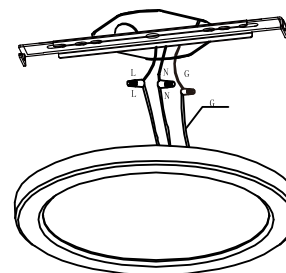

Step5: Align the square holes on both sides of the light body with mounting bracket, and insert the light body vertically upwards into the holes on both sides, and then rotate and lock towards "close" to make the back of the panel light flush with the surface of the ceiling.as shown in Figure 4.

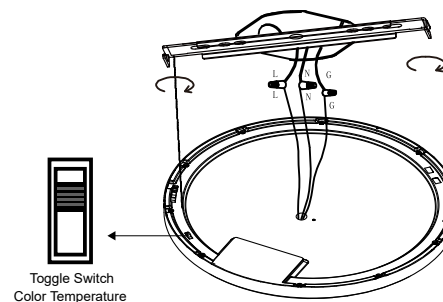

Step 6: Turn on the electricity to check whether the lighting is normal, as shown in Figure 5.

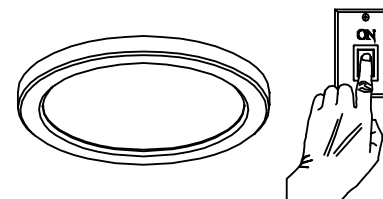

PACKAGING



<i>Model</i>	<i>Size</i>	<i>G.W (KG)</i>	<i>Carton Size (CM)</i>	<i>QTY/ctn(pcs)</i>
LM-SDL050	5"	9.3KG	31*25*32	(40PCS/CTN)