



No Flicker




DIMMABLE



50000 Hrs



LUMICOR
LIGHTING

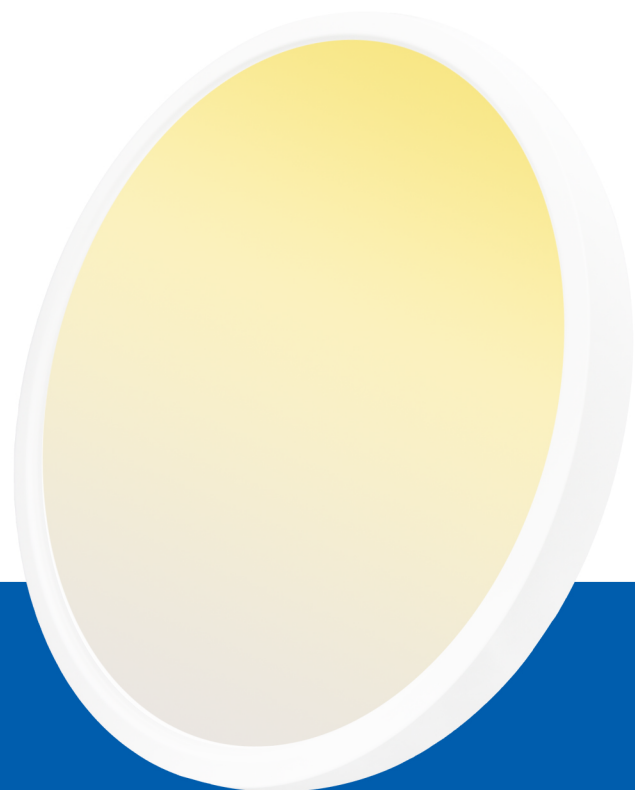

LED Flush Mount Panels

- 3CCT/5CCT
- 9/12/15INCH



SPECIFICATIONS:


Size	9 "	12 "	15 "
Power(Wattage)	18W	24W	30W
Lumen	1300LM	2000LM	2500LM
Input voltage	AC120V 50/60hz		
Color Temperature	3CCT(30K-40K-50K)/5CCT(27K-30K-35K-40K-50K)		
Shape	Round		
Light Color	White		
IP Rate	IP44		

Input voltage	AC120V
Power Factor	0.95~0.98
Operating Temperature	-37.9℃ - 40℃
Working Hours	50,000hrs
CRI	>80
LED Type	SMD2835
Installation of LED Driver	Internal
Type of LED Driver	Constant current output
Energy Level	A
Triac dimmable	Triac dimmable
Testing:	Waterproof ,Dimming ,Aging Testing
<u>Life Span Based on 3hrs/day</u>	5years
Beam Angle	120
Warranty	5 years
Certificates	ETL/ES/FCC
Brand of LED Chip	Epistar

Ordering Guide


Product (Mode)	Size(Inch)	Power	Voltage	CCT	Lumen	Beam Angle	Dimmable	Finish
LM-SDL010-I18-R-3C LM-SDL010-I18-R-5C	9INCH	18W	AC120V	3CCT(30-40-50K) 5CCT(27-30-35-40-50K)	1300LM	110°	Triac dimmable	BK=Black WH=White
LM-SDL010-L24-R-3C LM-SDL010-L24-R-5C	12INCH	24W	AC120V	3CCT(30-40-50K) 5CCT(27-30-35-40-50K)	2000LM	110°	Triac dimmable	BK=Black WH=White
LM-SDL010-O30-R-3C LM-SDL010-O30-R-5C	15INCH	30W	AC120V	3CCT(30-40-50K) 5CCT(27-30-35-40-50K)	2500LM	110°	Triac dimmable	BK=Black WH=White

Products Dimensions

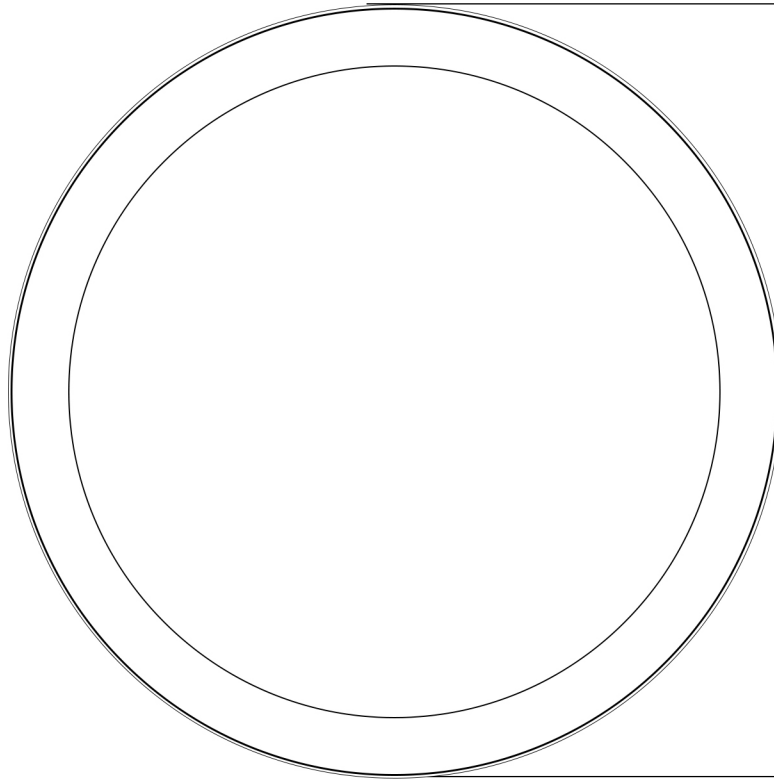


9in(230mm)
12in(300mm)
15in(380mm)

Features

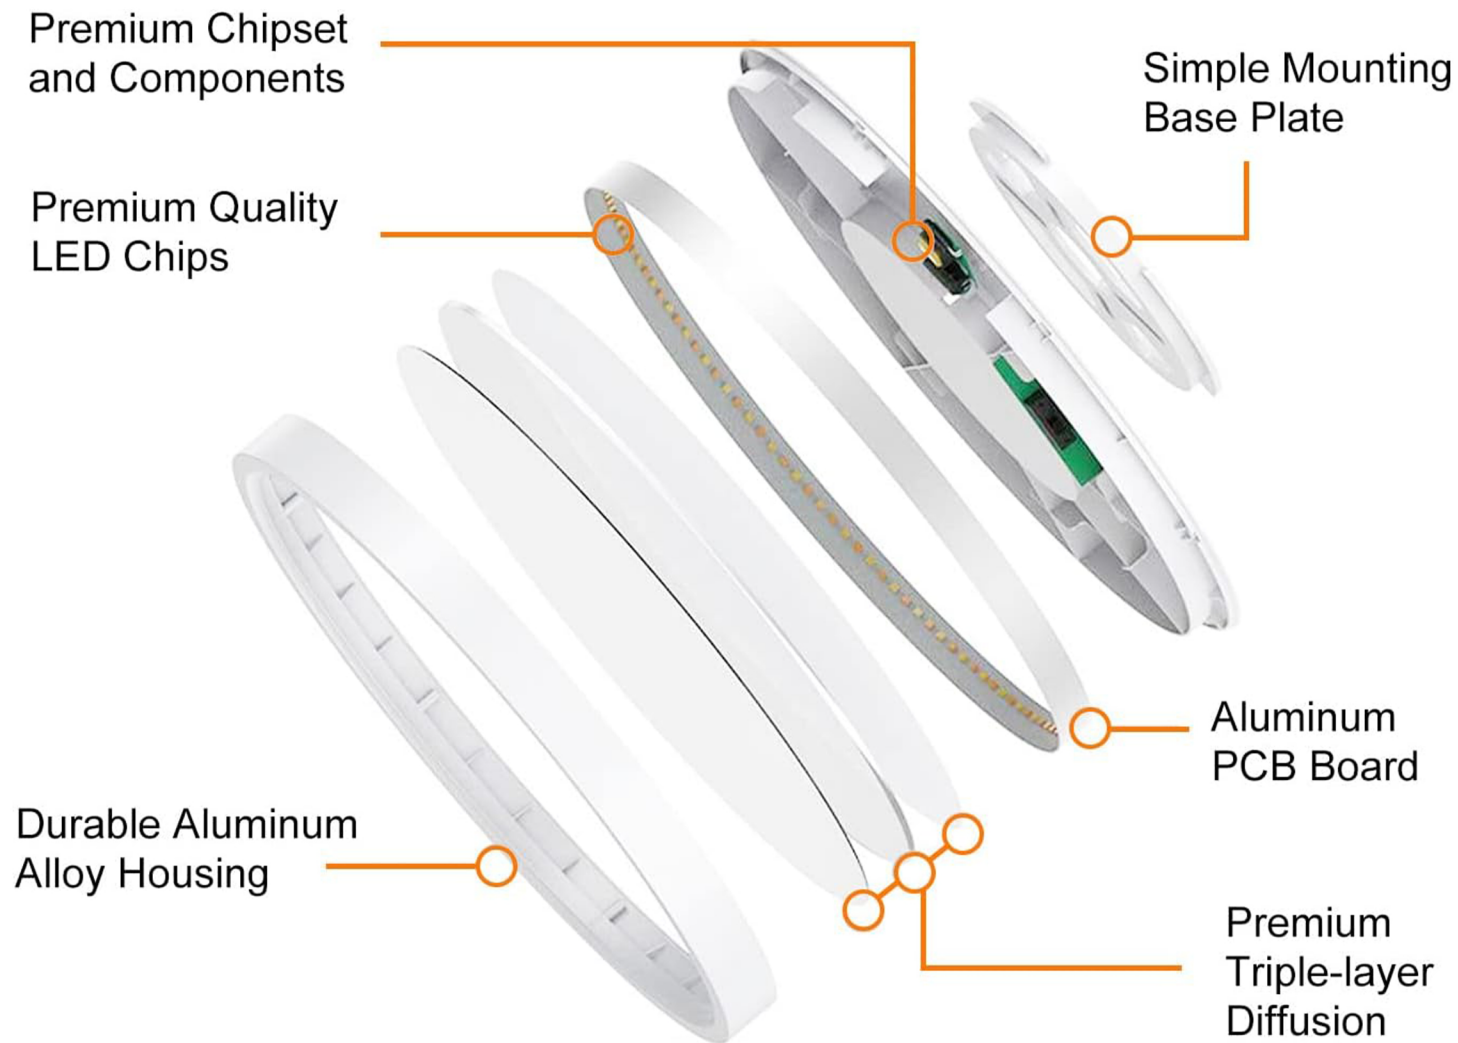


3CCT

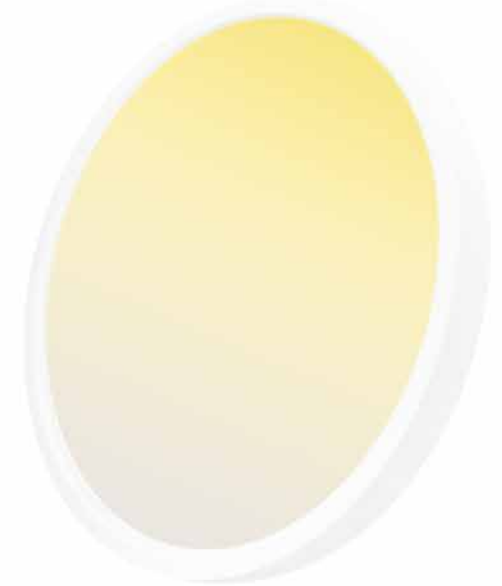


<i>Model No</i>	<i>Size</i>	<i>Voltage</i>	<i>Wattage</i>	<i>LUMEN</i>	<i>CCT(K)</i>
LM-SDL010-I18-R-3C	9IN	AC120V	18W	1300LM	3CCT(30K-40K-50K)
LM-SDL010-L24-R-3C	12IN	AC120V	24W	2000M	3CCT(30K-40K-50K)
LM-SDL010-O30-R-3C	15IN	AC120V	30W	2500LM	3CCT(30K-40K-50K)

5CCT

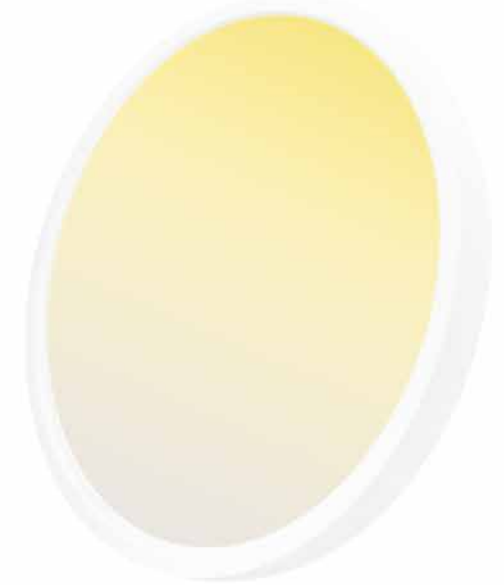

<i>Model No</i>	<i>Size</i>	<i>Voltage</i>	<i>Wattage</i>	<i>LUMEN</i>	<i>CCT(K)</i>
LM-SDL010-I18-R-5C	9IN	AC120V	18W	1300LM	5CCT(27K-30K-35K-40K-50K)
LM-SDL010-L24-R-5C	12IN	AC120V	24W	2000LM	5CCT(27K-30K-35K-40K-50K)
LM-SDL010-O30-R-5C	15IN	AC120V	30W	2500LM	5CCT(27K-30K-35K-40K-50K)

Packages

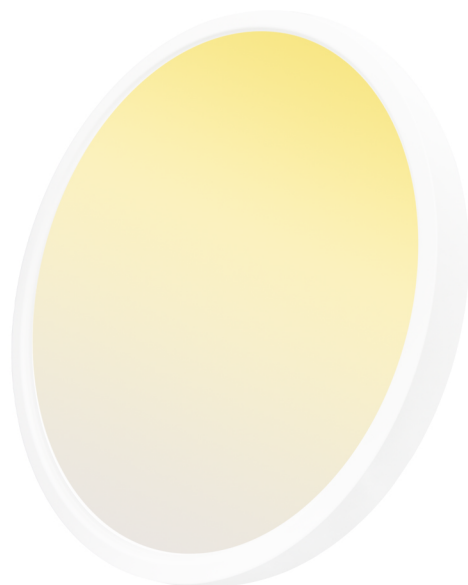

Size	Watts (W)	G.W (KG)	Carton Size (CM)	QTY/ctn(pcs)
9INCH	18W	11.8	49*32.5*25	20
12INCH	24W	9.1	32.5*32.5*32.5	10
15INCH	30W	13.9	40.5*32*40.5	10

INSTALLATION GUIDE



1: Fix the base plate onto the ceiling with 4 screws.



2: Connect L/N wires with quick connectors.



3: Push up the flush mount ceiling light.



4: Install the ceiling lamp on the base plate by rotating clockwise.

One app for all your Word, Excel, PowerPoint and PDF needs. Get the Microsoft 365 Copilot app:
<https://aka.ms/GetM365>